

 ICOM

HF/VHF/UHF ALL MODE TRANSCEIVER

IC-7100

Intuitive Touch Screen,
Quick Response,
Multi-band Radio



HF/50/144/440MHz
Controls at Your Fingertips
with an Angled Display



D-STAR

Intuitive Touch Screen, Quick Response, Multi-band Radio

Fingertip Controls

Intuitive Touch Screen Interface

The innovative touch screen interface provides quick and smooth operation for setting and editing various functions and memories.



One Touch Selection

For example, if you want to change the operating band, tap the frequency on the display. The band keys will be shown to select the operating band. Touching the multi-function meter indicator for 1 second will quickly change the transmit meter functions.



Straight Forward Operation

Just tap the mode, filter, function etc, you need to change. The touch screen responds naturally, changing your settings.



Software Keypad

Entering frequency, callsign or editing memory channels has never been this easy. The software keypad on the touch screen allows you to input alphanumeric characters incredibly quickly.



Angled Display

Touch Screen Control Portal

The radio control head features a large, multi-function, "touch screen" dot-matrix LCD display that is positioned for easy view and operation. The controller is compact in size, making it ideal for limited vehicle or desktop space.


Resistive Touch Screen

The 48.6x75.9 mm; 1.91x2.99 in large resistive touch screen display can be operated while wearing gloves.



Controller Mounted Speaker and Jacks

The unique remote head design is perfect for providing loud, clear audio as well as jacks for an external speaker/headphones as well as a key and microphone.

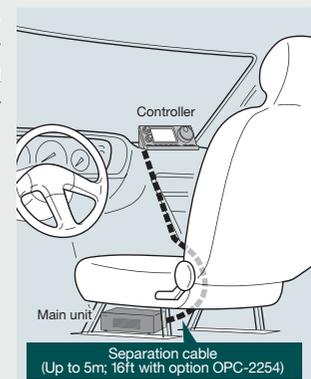

Separation cable (Up to 5m; 16ft with option OPC-2254)



HF/50/144/430/440MHz Multi-band, Multi-mode

The IC-7100 fully covers the HF, 50, 144, 430/440 MHz amateur bands in multiple modes, providing 100W on HF/50MHz bands, 50W on 144MHz band and 35W on 430/440MHz band.

Digital Features Controlled by the IF DSP

A high-performance 32-bit floating point IF DSP delivers rich digital signal processing features, including digital IF filter, digital twin PBT, noise reduction, CW auto tune, etc. Those digital features work on all bands from HF to V/UHF bands.




32-bit floating point IF DSP

DSP Controlled AGC Function Loop

The digital signal processing is incorporated into the AGC function loop. The results of signal processing provide feedback to the AGC function. The AGC function works on the intended signal and produces a constant audio output.

The AGC time constants are flexibly adjustable from slow, middle, fast (or AGC off) for each operating mode.

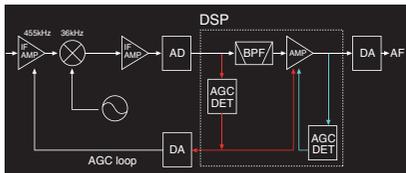


AGC function loop

D-STAR DV Mode (Digital Voice + Data)

The IC-7100 provides D-STAR DV mode digital voice and low speed data communication.

DR (D-STAR Repeater) Mode Operation

The DR mode operation makes the D-STAR operation simple and straight forward, even if you are new to D-STAR operation.




DR mode display

Near Repeater Function

With an external, 3rd party GPS*, search the internal database based on your location.

* External GPS receiver or manual data input required.



Near repeater function

SD Memory Card Slot for Saving Data

When used with an SD card, the SD card can store various contents including voice memory, memory channels, D-STAR repeater memories and other personal settings can be saved to the SD card and can be loaded to the transceiver.



SD memory card slot

Easy Vehicle Mounting with Optional MBF-1


The combination of the optional MBF-1 suction cup mounting base and MBA-1 controller bracket provides easy tilt and swivel adjustments for mobile operation. The large suction cup can mount to dashboards or other flat surfaces and can be removed easily.

MBF-1



Optional RS-BA1 IP Remote Control Software

The optional RS-BA1 software allows you to operate the IC-7100 from a remote PC over the Internet or local home network.

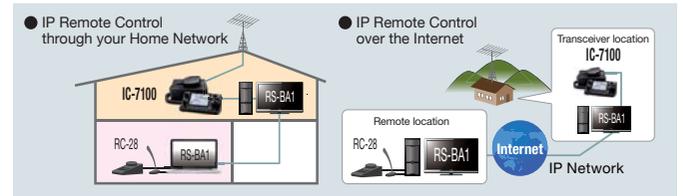

Built-in RTTY Functions

The built-in RTTY decoder allows you to instantly read an RTTY message on the display. No external TNC or PC required for reading. The eight RTTY memories can memorize and transmit often used RTTY sentences. The RTTY memory is 70 character per memory channel.

Other Features

- CW full break-in, CW receive reverse, CW auto tuning
- Optional multi-function microphone, HM-151
- Band scope and SWR graphic display
- RF speech compressor controlled by the DSP
- Voice memory function
- Multi-function Meter
- 495 regular, 4 call, 6 scan edge and 900 DR mode repeater channels
- 4 channels TX voice memories
- ± 0.5 ppm frequency stability
- Auto reply function*
- Digital callsign squelch and digital code squelch*
- 12.5kHz IF output for DRM (Digital Radio Mondiale) receive

* D-STAR DV mode only



HF/VHF/UHF ALL MODE TRANSCEIVER

IC-7100

SPECIFICATIONS

GENERAL

Frequency coverage*1	(Unit: MHz)			
Receiver	0.030–199.999*2 400.000–470.000*2			
Transmit	1.800–1.999	3.500–3.999	5.255–5.405*2	7.000–7.300
	10.100–10.150	14.000–14.350	18.068–18.168	21.000–21.450
	24.890–24.990	28.000–29.700	50.000–54.000	144.000–148.000
	430.000–450.000			

*1 Showing USA version. Varies according to version.
*2 Some frequency bands are not guaranteed.

Mode	USB, LSB, CW, RTTY, AM, DV, FM, WFM (Rx only)		
No of memory channels	495 regular, 4 call, 6 scan edges, 900 D-STAR repeater channels		
Antenna connector	SO-239x2 (one each for HF/50MHz and 144/430/440MHz, 50Ω)		
Operating Temp. range	–10°C to +60°C; +14°F to +140°F		
Frequency stability	±0.5ppm (0°C to +50°C @ 430MHz)		
Power supply requirement	13.8V DC ±15%		
Current drain (at 13.8V DC)	TX (Max. power): 22A (HF/50MHz), 16A (144/440MHz) RX (Max. audio/standby): 1.2A/0.9A		
Dimensions (WxHxD, projections not included)	Main unit 167x58x225 mm; 6.57x2.28x8.86 in Controller 165x64x78.5 mm; 6.5x2.52x3.09 in		
Weight (approx.)	Main unit 2.3 kg; 5.1 lb	Controller 0.5 kg; 1.1 lb	

TRANSMITTER


Output power (at 13.8V DC)	HF/50MHz	144MHz	430/440MHz
SSB/CW/RTTY/FM/DV	2–100W	2–50W	2–35W
AM	1–30W	–	–
Modulation system	SSB : Digital P.S.N. modulation, AM : Digital low power modulation FM : Digital phase modulation, DV : GMSK digital phase modulation		
Spurious emissions	Less than –50dB (HF bands), Less than –63dB (50MHz) Less than –60dB (144/430/440MHz)		
Carrier suppression	More than 50dB		
Unwanted sideband	More than 50dB		

RECEIVER

Intermediate frequencies	SSB/CW/AM/FM/RTTY/DV WFM 124.487MHz, 455kHz, 36kHz 134.732MHz, 10.700MHz			
Sensitivity	(HF: Preamp-1 ON, 50MHz: Preamp-2 ON, 144/430/440MHz: Preamp ON) 0.5–1.8MHz 1.8–29.9MHz 50–54MHz 144/430/440MHz			
SSB/CW (BW=2.4kHz, 10dB S/N)	–	0.15µV	0.12µV	0.11µV
AM (BW=6kHz, 10dB S/N)	13µV	2µV	1µV	1µV
FM (BW=15kHz, 12dB SINAD)	0.5µV (28–29.7MHz)	0.25µV	0.18µV	0.18µV
DV (1% BER)	1µV (28–29.7MHz)	0.63µV	0.35µV	0.35µV
WFM (12dB SINAD)	–	–	10µV (76–108MHz)	–
Selectivity	More than	Less than		
SSB (BW=2.4kHz, sharp)	2.4kHz/–6dB	3.4kHz/–40dB		
CW (BW=500Hz, sharp)	500Hz/–6dB	700Hz/–40dB		
RTTY (BW=500Hz)	500Hz/–6dB	800Hz/–40dB		
AM (BW=6kHz)	6.0kHz/–6dB	10kHz/–40dB		
FM (BW=15kHz)	12kHz/–6dB	22kHz/–40dB		
DV (12.5kHz spacing)	–50dB	–		
Spurious and image rejection ratio	More than 70dB (HF/50MHz), More than 65dB (144/430/440MHz) (except 1/2 IF through on 50MHz, IF through on 144MHz)			
Audio output power	More than 2.0W (10% distortion, 8Ω load, 13.8V DC)			

All stated specifications are subject to change without notice or obligation.

Rear Panel View (Main unit)

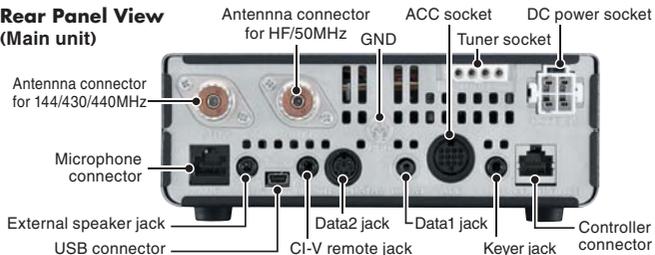

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.

PS-126 DC POWER SUPPLY

13.8V DC, 25A max.

AH-4 HF+50MHz AUTOMATIC ANTENNA TUNER

Covers 3.5–54MHz with a 7m (23ft) or longer wire antenna.

AH-2b ANTENNA ELEMENT

Covers 7–54MHz. Use with AH-4.

AT-180 HF+50MHz AUTOMATIC ANTENNA TUNER

Covers 1.8–54MHz amateur band (Except for 5MHz band).

AH-5NV NVIS KIT

Fiberglass mobile mounting antenna element for use with AH-740. Covers 2.2–30MHz (amateur band) with AH-740.

AH-740 AUTOMATIC TUNING ANTENNA

Covers 2.5–30MHz (amateur band). OPC-2321 is required.

SP-35 EXTERNAL SPEAKER

HAND MICROPHONES

HM-36 OPC-589 is required. **HM-103** Compact type. **HM-151** Remote-control microphone. **HM-198** Same as supplied.

DESKTOP MICROPHONES

SM-50 Dynamic mic OPC-589 is required. **SM-30** OPC-589 is required.

IC-PW1 HF+50MHz 1kW HF LINEAR AMPLIFIER

OPC-599 is required.

MOUNTING BRACKETS

MB-62 Mobile mounting bracket for the main unit. **MBF-1** Mounting base for the controller. **MBA-1** Controller bracket.

RS-BA1 IP REMOTE CONTROL SOFTWARE **RC-28 USB REMOTE ENCODER**

For use with RS-BA1

- **CS-7100 CLONING SOFTWARE**
- **CT-17 CI-V LEVEL CONVERTER**
- **OPC-2253 SEPARATION CABLE 3.5m (11ft)**
- **OPC-2254 SEPARATION CABLE 5m (16ft)**
- **OPC-2321 CONTROL CABLE FOR AH-740**
- **OPC-589 MODULAR 8-PIN CABLE ADAPTER**
- **OPC-599 CABLE ADAPTER**
Converts 13-pin ACC connector to 7-pin + 8-pin ACC connector for connection with IC-PW1.
- **OPC-1529R DATA CABLE for DV mode**
Data 1 Jack (IC-7100) to RS-232C cable.
- **OPC-2218LU DATA CABLE for DV mode**
Data 1 Jack (IC-7100) to USB cable.

- Supplied accessories:** (* May differ depending on version)
- Hand microphone, HM-198
 - DC power cable
 - CW keyer plug
 - Spare fuses
 - Separation cable, OPC-2253
 - 13-pin plug ACC cable
 - USB cable
 - Ferrite bead*

D-STAR (Digital Smart Technology for Amateur Radio) is a digital radio protocol developed by JARL (Japan Amateur Radio League). Icom, Icom Inc. and Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. All other trademarks are the properties of their respective holders.

Icom Inc.

1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.
www.icomamerica.com

Icom (Europe) GmbH
www.icomeurope.com

Icom (Australia) Pty. Ltd.
www.icom.net.au

Your local distributor/dealer:

Icom Canada
www.icomcanada.com

Icom Spain S.L.
www.icomspain.com

Shanghai Icom Ltd.
www.bjicom.com

Icom Brazil
E-mail: sales@icombrasil.com

Icom (UK) Ltd.
www.icomuk.co.uk

Icom France s.a.s.
www.icom-france.com